

MZ-500 骑行音箱PLUS 安装指南

感谢您购买本产品。使用蓝牙音箱前，请阅读所有安全信息和操作说明。


安全须知

- 阅读所有说明，并保存起来以备日后参考。
- 请遵循产品操作的所有说明。
- 请勿将其放置在热源附近。避免靠近散热器，火炉和其它会发热的设备。避免长期暴露在阳光和高温下。
- 此音箱有2种模式：蓝牙模式和TF卡模式。
- 请注意：当音乐暂停10分钟后，音箱将进入休眠关机。要重新启动音箱，请按电源开/关/模式按钮。


包装内容

- | | | | |
|---------------|----|-------|----|
| • MZ-500主机 | X1 | • 夹扣 | X1 |
| • 自行车支架 | X1 | • 说明书 | X1 |
| • 0.6m USB充电线 | X1 | | |

产品描述

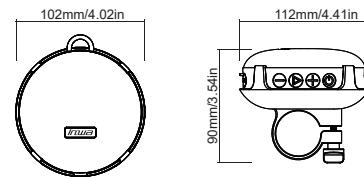

控制面板和界面

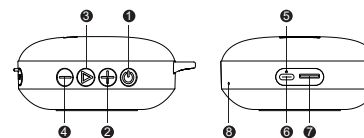


- ① 电源开/关/模式：长按2秒为开/关机；开机状态短按切换BT/TF模式。
- ② +：增加音量：长按为音量加，短按为下一曲。
- ③ 播放/暂停/配对：在音箱蓝牙连接状态，或TF卡模式下，短按可以播放/暂停；在音箱蓝牙连接状态，短按可以拨打电话，长按2秒强制断开当前连接，进入蓝牙搜索配对状态。
- ④ -：降低音量：长按为音量减，短按为上一曲。
- ⑤ 电源/充电指示灯（蓝/红灯）
- ⑥ 电源接口：DC 5V 1A
- ⑦ SD卡接口
- ⑧ 麦克风

产品参数

- 工作时长：60%音量连续工作10hr
- 待机时长：≥300hr
- 蓝牙范围：≤10m
- 频率响应：20HZ-20KHZ
- 蓝牙版本：V5.0
- 充电时长：2-4hr
- 工作电压：5V/1A
- 额定功率：8W
- 防水等级：IP67
- 电池容量：2200mAh


操作指令

- 步骤1
长按电源按钮“⏻”2秒，有开机提示音，开机后，蓝色指示灯快闪，音箱进入蓝牙配对状态，默认音量80%，每次打开音箱后，音箱都会自动恢复默认音量80%。



注意：
在蓝牙播放时插入TF卡则自动切换到TF卡播放模式。

- 步骤2
打开手机或其他蓝牙设备上的蓝牙功能，然后搜索名为MZ-500的音箱。与音箱连接。



步骤3

配对成功后，会有提示音，蓝色指示灯长亮。

步骤4

在手机上播放音乐。播放音乐时，蓝色指示灯慢闪。

步骤5

如何将音箱与新设备连接：
将音箱与设备连接时，您可以长按播放/暂停/配对按钮“▶”2秒以切断当前连接并进入配对状态。然后，蓝色指示灯将长亮，音箱可以与新设备连接。




注意：
蓝牙状态开机自动回联，无连接10分钟关机。

充电提示


1. 低电量时音箱“低电量报警”提示，您需为音箱进行充电。
2. 充电时，红色指示灯常亮，充满电后红色指示灯熄灭。
3. 建议对带锂电池产品如不使用时每三个月充一次电。

支架安装指南

- 步骤1
如图1所示，按下支架的凸起部分，取出音箱，然后再安装支架。



- 步骤2
如图2所示，从支架上拧下螺钉。




- 步骤3
将防滑垫1放入支架的环中，将支架通过环固定到自行车上，然后用在步骤2中取出的螺钉拧紧支架。



注意：
如果转向轴太细且不能仅用1个防滑垫固定，则可以将垫1和2放入环中，使转向轴穿过环，然后用螺钉拧紧支架。如果支架仍然松动，则可以将折叠防滑垫2，然后将防滑垫1和折叠垫2放入环中，使转向轴穿过环，然后用螺钉拧紧支架。

步骤4

安装支架后，您可以将音箱推入支架。听到咔哒声后，音箱就安装好了。




蓝牙音箱连接记忆功能

- 如果设备蓝牙功能开启，打开音箱后，音箱将自动连接到最后一个配对设备。


蓝牙音箱通话功能

- 接听电话：当音箱与手机连接时，如有来电，您可以短按播放/暂停/配对按钮“▶”即可接听。
- 挂断电话：当音箱与手机连接时，通话中您可以短按播放/暂停/配对按钮“▶”即可挂断。
- 拒绝通话：当音箱与手机连接时，您可以通过长按播放/暂停/配对按钮“▶”来拒绝来电。



TF卡模式

插入SD卡后，音箱将进入TF卡模式，您可以短按电源按钮“⏻”进入模式切换。




在TF卡模式下，当播放音乐时，蓝色指示灯慢闪。

TWS配对

两个未配对过TWS的音箱分别开机，蓝色指示灯闪烁。

短按两次任一音箱的播放/暂停/同步按钮“▶”，即可进入TWS配对状态。



配对成功后，主音箱蓝色指示灯闪烁，副音箱蓝色指示灯长亮，发起TWS配对的音箱为主音箱。

注意：
已配对成功的两个音箱，再次短按两次主音箱的播放/暂停/同步按钮“▶”，可断开TWS连接。

保修卡

产品型号	购买日期
经销商	用户姓名
联系电话	电子邮件
用户地址	

保修记录

用户姓名	故障描述	维修日期	维修人员签字

合格证

日期：_____

检验员：_____

MZ-500 Riding Speaker PLUS

INSTALLATION GUIDE

Thank you for buying this product. Please read all safety information and operation instruction before using the bluetooth speaker.

SAFETY INSTRUCTIONS


- Read all instructions and save them for personal reference in the future.
- Follow all directions for operating the product.
- Do not place it near a heat source. Avoid getting close to radiators, stoves and other heat-generating equipment. Avoid long-term exposure to sunlight and high temperature.
- This speaker has 2 modes: Bluetooth mode and TF card mode.

• Please note: When the music is paused for 10 minutes, the speaker will enter sleep and shut down. To restart the speaker, press the power On/Off/Mode button.


PACKAGE CONTENTS

- MZ-500 Host X1
- Speaker clips X1
- Speaker holder for bicycles X1
- Manual X1
- 0.6m usb charging cable X1

PRODUCT DESCRIPTION

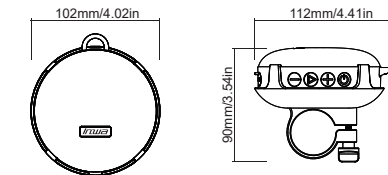

CONTROL PANEL AND INTERFACE

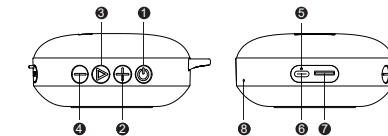

- 1 : Power On/Off/Mode: long press for 2 seconds to turn on/off; short press to switch BT/TF mode in power-on state.
- 2 : Increase volume: long press to increase volume, short press to next song.
- 3 : Play/Pause/Pair: In the speaker Bluetooth connection state, or in the TF card mode, short press to play/pause; in the speaker Bluetooth connection state, short press to make and receive calls, long press for 2 seconds to forcefully disconnect the current connection and enter Bluetooth search for pairing status.
- 4 : Decrease the volume: long press to decrease the volume, short press to the previous song.
- 5 : Power/Charge indicator (blue/red light)
- 6 : Power Port: DC 5V 1A
- 7 : SD Card Slot
- 8 : Microphone

PRODUCT PARAMETERS

- Working hours: 10h battery life at 60% volume
- Standby time: ≥300 hours
- Bluetooth range: ≤10m
- Frequency: 20HZ-20KHZ
- Bluetooth version: V5.0
- Charging time: 2-4 hours
- Working voltage: 5V/1A
- Rated power: 8W
- Waterproof level: IP67
- Battery capacity: 2200mAh

OPERATION INSTRUCTION

• Step 1

Long press the power button "" for 2 seconds, there will be a power-on prompt sound. After power-on, the blue indicator light flashes quickly, and the speaker enters the Bluetooth pairing state, and the default volume is 80%. Each time the speaker is turned on, the speaker will automatically restore the default volume of 80%.

Notice:


Inserting a TF card during Bluetooth playback will automatically switch to TF card playback mode.

• Step 2

Turn on the Bluetooth function on your mobile phone or other Bluetooth device, and then search for the speaker named MZ-500.

Connect with speakers.

1. Search for MZ-500 speakers on the mobile phone;
2. Connect MZ-500 speakers;
3. Choose to play music through MZ-500 speakers.



• Step 3

After the pairing is successful, there will be a beep and the blue indicator light will be on.


• Step 4

Play music on the phone. When playing music, the blue indicator light flashes slowly.

• Step 5

How to connect speakers with new equipment:

When connecting the speaker to the device, you can press and hold the Play/Pause/Pairing button "" for 2 seconds to cut off the current connection and enter the pairing state. Then, the blue indicator light will stay on and the speaker can be connected to the new device.



Note:

When Bluetooth is turned on, it will automatically reconnect, and it will turn off after 10 minutes without connection.


Charging tips

1. When the battery is low, the speaker "low battery alarm" prompts, you need to charge the speaker.
2. When charging, the red indicator light is always on, and the red indicator light is off when it is fully charged.
3. It is recommended to charge the product with lithium battery every three months when not in use.

INSTALLATION GUIDE OF HOLDER


• Step 1

As picture 1 shows, pressing the bulge of the holder, takeout the speaker before installing the holder.




• Step 2

As picture 2 shows, screw out the screws from the holder.



• Step 3

Put the non-slip mat 1 into the ring of the holder, fix the holder onto the bike through the ring, and tighten the holder with screw which has been taken out in step 2.

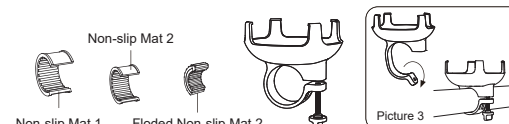


Note:

If the steering axle is too thin and can not be fixed with only 1 non-slip mat, you can put mat 1 & 2 into the ring, pass the steering axle through the ring, then tighten the holder with screw. If the holder is still loose, you can fold the non-slip mat 2, and put the mat 1 & folded mat 2 into the ring, pass the steering axle through the ring, then tighten the holder with screw.

• Step 4

After installing the holder, you can push the speaker into the holder. Upon hearing a click, the speaker is installed well.



CONNECTION MEMORY FUNCTION OF THE SPEAKER

- The speaker will automatically connect to the last paired device, in case that BT function of the device is on, after turning the speaker on.

TEL FUNCTION OF THE SPEAKER

- Answer a call: When the speaker is connected to the mobile phone, if there is an incoming call, you can short press the Play/Pause/Pairing button "" to answer it.


- Hang up the call: When the speaker is connected to the mobile phone, you can short press the Play/Pause/Pairing button "" to hang up during the call.

- Reject call: When the speaker is connected to the mobile phone, you can reject the call by pressing and holding the Play/Pause/Pairing button "" .

TF CARD MODE

After inserting the SD card, the speaker will enter the TF card mode, you can short press the power button "" to enter the mode switch.


In TF card mode, when playing music, the blue indicator light flashes slowly.



TWS pairing

Two speakers that have not been paired with TWS are turned on separately, and the blue indicator light flashes.

Short press the Play/Pause/Pairing button "" of any speaker twice to enter the TWS pairing state.



After the pairing is successful, the blue indicator of the main speaker flashes, and the blue indicator of the sub speaker is on. The speaker that initiates TWS pairing is the main speaker.

Notice:

For the two speakers that have been paired successfully, short press Play/Pause/Pairing button "" of the main speaker twice again to disconnect the TWS.

Warranty card

Model	Date of purchase
Distributor	Name
TEL	E-mail
ADD	

Warranty records

Name	Fault description	Repair date	Maintainer

CERTIFICATE

DATE: _____
QC: _____