


Inwa®

# 花园灯无线组网音箱

## 使用说明书

### MZ-610

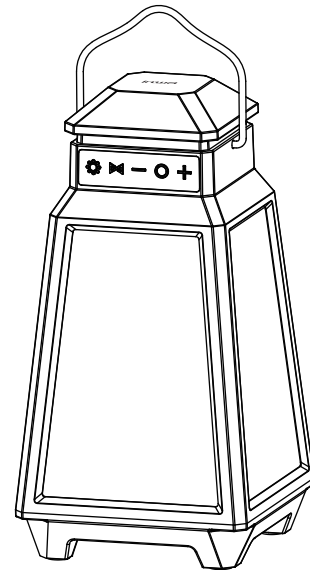

Inwa®

中文

#### 安全须知

- 请仔细阅读本说明书并妥善保管以备将来参考。
- 请将本产品调至合适音量，避免对您的听力造成损害。
- 为减少火灾和触电危险，请勿让本产品淋雨或受潮。
- 请勿将本产品放置在热源附近，避免靠近散热器，火炉和其它会发热的设备。
- 请勿堵塞本产品的开口处，勿将物体塞入本产品的通风口或槽隙中。
- 请勿丢弃，避免因跌落造成本产品损坏。
- 如果电池更换不当会有爆炸危险，只能用同样类型或等效类型的电池来更换。
- 无论设备因何种原因损坏，都必须及时请专业维修人员修理，擅自拆卸将使保修失效。


#### 包装内容

- 音箱 X1
- USB数据线 X1
- 说明书 X1

#### 产品参数

- 工作时长: 10hr(60%音量)
- 待机时长: ≥300hr
- 蓝牙范围: ≤20m
- 频率响应: 20HZ-20KHZ
- 蓝牙版本: V5.0
- 充电时长: 2-4hr
- 输入电压: DC 5V
- 额定功率: 8W
- 防水等级: IP65
- 电池容量: 3600mAh
- 产品尺寸: 107\*107\*210mm
- 产品净重: 490g(含电池)


#### 控制面板和界面

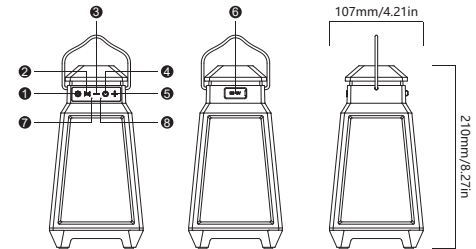

- ① 灯光颜色切换键: 单按依次切换: 1开机默认为多彩呼吸颜色变换灯效(有音乐时闪灯)→2白色(不闪灯)→3暖白色(不闪灯)→4蓝色(不闪灯)→5绿色(不闪灯)→6紫色(不闪灯)→7红色(不闪灯)→8粉色(不闪灯)→9灭灯
- ② 组网配对键: 长按2秒进入组网状态, 再长按2秒退出组网状态, 双击强制蓝牙配对。
- ③ 音量减键: 单按为上一曲, 长按为音量减。
- ④ 开机键: 单按为播放/暂停, 长按2秒为开关机。
- ⑤ 音量加键: 单按为下一曲, 长按为音量加。
- ⑥ 电源接口: DC 5V
- ⑦ 主机/从机指示灯
- ⑧ 充电指示灯

#### 蓝牙配对


- 步骤1**  
长按开机键“④”2秒, 有提示音, 进入蓝牙配对状态, 蓝灯快闪。
- 步骤2**  
打开手机或其他蓝牙设备上的蓝牙功能, 点击选择“MZ-610”进行连接。
- 步骤3**  
配对成功后会有提示音, 蓝灯长亮。



- 步骤4**  
**如何将音箱与新设备连接:**  
在音箱与设备连接时, 双击组网配对键“②”以切断当前连接并进入配对状态, 蓝灯将快闪, 音箱可以与新设备连接。

#### 同步音箱

- 首次组网配对方法:**  
1.先打开一个音箱, 连上手机, 蓝灯长亮, 作为主机。  
2.打开其余音箱, 长按组网配对键“②”2秒, 红灯快闪, 自动连接主机。连上后红灯长亮, 作为从机。  
**注意:** 如果您没有同步任何音箱, 请参阅上面的“蓝牙配对”, 同步音箱前需先进行蓝牙设备连接。

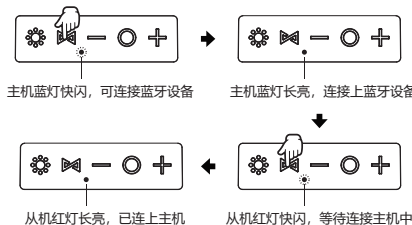

**注意:** 两台或多台音箱连接成功后, 长按任一从机音箱的组网配对键“②”2秒至蓝灯快闪即解除组网模式。

#### 音箱充电


- 1.打开硅胶盖, 然后将电源适配器的Type-C线插入充电插口。
- 2.将电源适配器插入电源插座。
- 3.充电时, 红色指示灯长亮; 当红色指示灯熄灭时为充满电。



#### 灯光显示

灯光功能必须开机才能更改灯光颜色, 按下灯光颜色切换键“①”, 依次显示以下顺序排列:

- 1.多彩呼吸颜色变换灯效 (有音乐时闪灯)
- 2.白色(不闪灯)
- 3.暖白色(不闪灯)
- 4.蓝色(不闪灯)
- 5.绿色(不闪灯)
- 6.紫色(不闪灯)
- 7.红色(不闪灯)
- 8.粉色(不闪灯)
- 9.灭灯



- 注意:**  
1.开机默认为多彩呼吸颜色变换灯效。  
2.灯光模式2-8中, 每次长按灯光颜色切换键“①”, 并循环调节亮度: 100%、75%、50%、25%。双击灯光颜色切换键“①”为关灯。

#### 保修卡

产品型号	购买日期
经销商	用户姓名
联系电话	电子邮件
用户地址	

#### 保修记录


用户姓名	故障描述	维修日期	维修人员签字

合格证

日期: \_\_\_\_\_  
检验员: \_\_\_\_\_

Inwa®

# GARDEN LIGHT WIRELESS SPEAKER User's Manual MZ-610

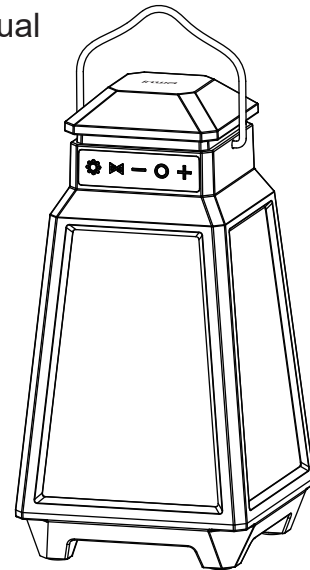

Inwa®

English

## Safety instructions

- Please read this manual carefully and keep it for future reference.
- Please adjust this product to the appropriate volume to avoid damage to your hearing.
- To reduce the risk of fire and electric shock, do not let this product get wet or wet.
- Do not place this product near the heat source, and avoid the radiator, stove and other equipment that will generate heat.
- Do not plug the opening of this product, and do not put objects into the vent or slot of this product.
- Do not throw to avoid damage to the product due to falling.
- If the battery is not replaced properly, there is an explosion risk. Only the same type or equivalent type of battery can be replaced.
- No matter what reason the equipment is damaged, it must be repaired by professional maintenance personnel in time. Unauthorized disassembly will invalidate the warranty.


## Package content

- Speaker X1
- USB data cable X1
- User manual X1

## Product parameters

- Working time: 10hr (60% volume)
- Standby time: ≥300hr
- Bluetooth range: ≤20m
- Frequency response: 20Hz-20KHz
- Bluetooth version: V5.0
- Charging time: 2-4hr
- Input voltage: DC 5V
- Rated power: 8W
- Waterproof grade: IP65
- Battery capacity: 3600mAh
- Product size: 107\*107\*210mm
- Product Weight: 490g(with battery)


## Control panel and interface

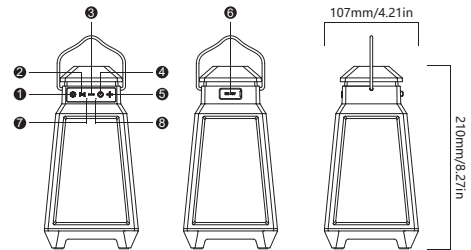

- Light color toggle key:**  
Single press to switch in sequence:  
Turn on the default color: Beat-driven light (flashing light when there is music) → White (not flashing light) → Warm white (not flashing light) → Blue (not flashing light) → Green (not flashing light) → Purple (not flashing light) → Red (not flashing light) → Pink (not flashing light) → Light off
- Networking pairing key:** press and hold for 2 seconds to enter networking status, press and hold for 2 seconds to exit networking status, and double click to force Bluetooth pairing.
- Volume down key:** single press for the previous song, long press for volume down.
- Power on key:** single press to play/pause, long press for 2 seconds to switch on.
- Volume up key:** single press for the next song, long press for volume up.
- Power interface:** DC 5V
- Master/slave indicator**
- Charge indicator**

## Bluetooth pairing


- Step 1**  
Press and hold the power-on key "⏻" for 2 seconds, there will be a prompt tone to enter the Bluetooth pairing status, and the blue light will flash quickly.
- Step 2**  
Open the Bluetooth function on the mobile phone or other Bluetooth devices, and click to select "MZ-610" to connect.
- Step 3**  
After successful pairing, there will be a prompt tone and the blue light will be on constantly.



- Step 4**  
**How to connect the speaker to the new device:**  
When the speaker is connected to the device, double-click the networking pairing key "⏻" to cut off the current connection and enter the pairing status. The blue light will flash quickly, and the speaker can be connected to the new device.

## Synchronous speaker


- First networking pairing method:
1. Open a speaker first, connect the mobile phone, and the blue light will be on constantly as the Main Speaker.
  2. Turn on the other speakers, long press the networking key "⏻" for 2 seconds, the red light flashes quickly, speakers will be automatically connected. When connected, the red light will be on constantly as Aux. Speakers.
- Note:**  
If you have not synchronized any speakers, please refer to "Bluetooth pairing" above. Before synchronizing speakers, you need to have the Main Speaker connected to a Bluetooth device. and any speaker can be as Main Speaker.

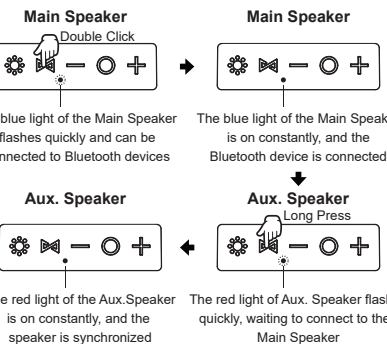

- Note:**  
After two or more speakers are connected successfully, press and hold the networking pairing key "⏻" of any Aux. speaker for 2 seconds until the blue light flashes quickly to leave the networking mode.

## Speaker charging


1. Open the silicone cover, and then plug the Type-C cable of the power adapter into the charging socket.
2. Plug the power adapter into the power socket.
3. When charging, the red indicator light is on for a long time; When the red indicator is off, it is fully charged.

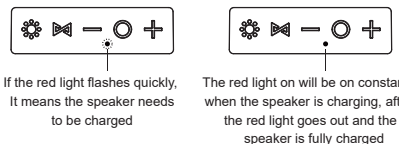

## Light display

After the speaker is turned on. Press the light color switch key "⚙️" to display the following light in sequence:

1. Beat-driven light (Flashes when there is music)
2. White (no flashing light)
3. Warm white (without flashing)
4. Blue (no flashing light)
5. Green (no flashing light)
6. Purple (no flashing light)
7. Red (no flashing light)
8. Pink (no flashing light)
9. Turn off the light



- Note:**
1. By default, after speaker is turned on. the beat-driven light is enabled.
  2. In the light mode 2-8, press and hold the light color switch key "⚙️" each time, and adjust the brightness circularly: 100%, 75%, 50%, 25%. Double-click the light color switch key "⚙️" to turn off the light.

## Support Information

- Need further help, you can contact us by
- A. Service E-mail: inwa\_support@innosystemtech.com
  - B. Or contact us on Amazon
1. Go to Your Orders.
  2. Find your order in the list.
  3. Select Problem with order.
  4. Choose your topic from list displayed. Select Contact seller.



GOAL REACH CONSULTING LTD  
OFFICE 1029 3 HARDMAN STREET 10TH  
FLOOR, SPINNINGFIELDS MANCHESTER,  
UK M3 3HF

OST UK 20230424000006 goalservice@hotmail.com

We simply act as UK representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.



SUCCESS COURIER SL  
CALLE RIO TORMES NUM.1, PLANTA 1,  
DERECHA, OFICINA 3, Fuenlabrada,  
Madrid, 28947 Spain

OST\_EU\_20230424000022 successservice2@hotmail.com

We simply act as EU representative for cross-border sellers, and are not manufacturers/importers/distributors for the product, nor involved in the manufacture/import/sale of the product. Therefore, we are not responsible for any after-sales services related to the product. In case of any product quality or infringement issues, the manufacturer/importer/seller shall be solely held responsible.