

中文

MZ-501 无线音响

操作指南

感谢您购买本产品, 请在使用蓝牙音响前, 阅读所有安全信息和操作指示。

安全说明

- 阅读所有说明, 并将它们保存起来供以后参考。
- 按照所有指示操作产品。
- 不要放在热源附近, 避免使用散热器, 火炉和其他产生热量的设备, 避免长时间暴露在阳光和高温下。
- 此音响有三种模式: 蓝牙模式, 音频模式和TF卡模式。
- 请注意: 当音乐暂停30分钟后, 音响进入睡眠模式。重新启动音响, 请按电源开关。


包装内容

MZ-501无线音响*1
0.6米 USB 充电线*1
1米音频线*1
挂绳*1

尺寸



音响控制面板和接口

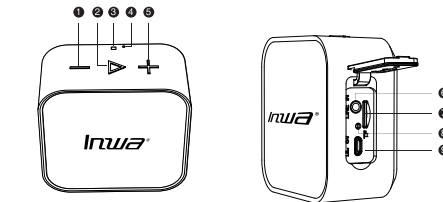


- ① 音量减/上一首
- ② 电源开/关 播放/暂停按钮, 蓝牙配对
- ③ 挂孔
- ④ 内置麦克风
- ⑤ 音量加/下一首
- ⑥ AUX音频接口
- ⑦ TF卡插槽
- ⑧ 指示灯
- ⑨ Micro USB端口: DC 5V/1A


参数

- 工作时间: 10-12h 60%音量工作
- 待机时间: ≥ 300 h
- 蓝牙范围: ≤ 15 m
- 频率: 20Hz-20kHz
- 蓝牙版本: V5.0
- 充电时间: 2.5-3小时
- 工作电压: 5V/1A
- 功率: 5W
- 防水等级: IPX7
- 电池容量: 750mAh

操作指示



音量减小: 长按“-”减少音量
上一曲: 短按“-”切换回前一首歌



打开音响: 长按“▶”, 直到听到“开机”
关闭音响: 长按“▶”, 直到听到“关机”

蓝牙配对: 按住电源键“▶”进入蓝牙模式


暂停/播放:

在蓝牙模式和TF卡模式下, 短按来播放或者暂停音乐。在 AUX 音频模式下, 短按2次播放音乐。

接电话: 当音响与电话连接时, 如果有电话打进来, 音响会发出嘟嘟声。按“▶”接电话

挂电话: 音响接通电话后, 按“▶”键挂断电话。

挂电话: 当音响连接电话时, 长按“▶”键拒绝电话呼叫




音量调大:
长按“+”以增加音量, 当它达到最大值时, 你会听到嘟声。

下一曲: 短按“+”以进入下一首歌曲。


MICRO USB充电口

请使用提供的micro USB充电线为音响充电, 使用小于5v的直流电源适配器。




Micro USB端口 USB充电线

指示灯



指示灯

充电指示:
当音响电量不足时, 会看到红色指示灯闪烁, 音响会自动关机。使用提供的USB线充电。当音响充电时, 你会看到一个红色指示灯。一旦音响充满电, 指示灯将变为蓝色。




指示灯

蓝牙配对:
按住电源键把音响打开。默认情况下, 音响将自动进入蓝牙模式。您将听到语音提示“蓝牙模式”, 蓝色指示灯将快速闪烁。配对成功后, 音响将发出嘟嘟声, 指示灯变为蓝色。

TF卡模式

你可以用TF卡模式播放音乐。你可以插入一个TF或Micro SD卡, 音响将自动读取它。随时随地欣赏你的音乐。




TF卡插槽



TF卡

AUX音频模式


如果你的设备连接不了蓝牙, 你可以通过3.5mm的音频线连接上电视或者其他设备。



蓝牙模式

你可以对你的设备进行如下模式配对:

1. 按住“▶”打开音响。音响将会默认进入蓝牙模式。你将听到“蓝牙模式”的语音提示, 一个蓝色指示灯将快速闪烁。
2. 第一次将音响和设备进行蓝牙配对时, 应打开设备的蓝牙功能, 并搜索音响。该设备将会显示音响的名称“MZ-501”。点击音响名称, 他将自动与设备连接。在成功配对后, 音响将发出嘟嘟声, 指示灯会变成蓝色。
3. 当设备与音响成功配对之后, 你可以通过设备来播放音乐, 通过音响来控制音乐。如果你想要用该音响连接不同设备, 短按“▶”两次以切断目前的蓝牙连接, 然后按照步骤二来进入蓝牙配对模式。

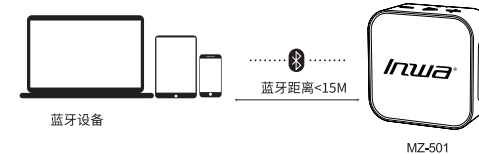

注:

1. 蓝牙连接工作时, 请不要插入TF卡或与音频线连接。
2. 当你打开音响时, 它会搜索最近连接的设备。如果设备的蓝牙被激活, 音响将自动连接和配对。成功配对后, 你会听到嘟嘟声。
3. 工作蓝牙有15米的有效通信范围。确保在这个范围内没有大的障碍物。为了更好的进行蓝牙连接, 最好在5米内使用你的设备。
4. 如果没有蓝牙连接或者没有播放音乐, 音响在30分钟内将会自动关机。



1 CE

2 CE

3 CE

4 CE

5 CE

6 CE

7 CE

English

MZ-501 Wireless Speaker

INSTALLATION GUIDE

Thank you for buying this product. Please read all safety information and operation instruction before using the bluetooth speaker.


SAFETY INSTRUCTIONS

- Read all instructions and save them for personal reference in the future.
- Follow all directions for operating the product.
- Do not set up near heat sources. Avoid radiators, stoves, and other devices that produce heat. Avoid long-term exposure to sunlight and high temperatures.
- There are 3 modes for this speaker: Bluetooth Mode, Audio Mode and TF Card Mode.
- Please note: When the music is paused for 30 minutes, the speaker will enter into Sleep Mode. To restart the speaker, please press Power ON/OFF.


PACKAGE CONTENTS

MZ-501 Wireless Speaker * 1
0.6m USB Charging Cable * 1
1m Audio Cable * 1
Lanyard * 1

DIMENSION

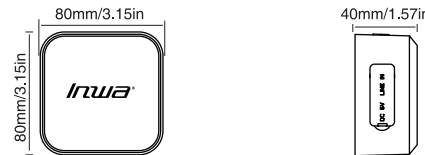

SPEAKER CONTROL PANEL AND PORTS

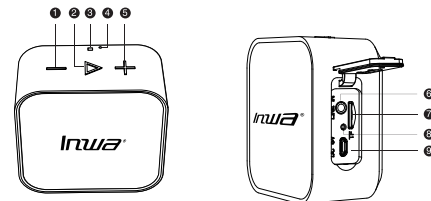


- | | |
|--|----------------------------|
| 1 Volume Down/Previous Song | 6 AUX Input Port |
| 2 Power On/Off, Play/Pause Button, Bluetooth Pairing | 7 TF Card Slot |
| 3 Lanyard Hole | 8 Indicator Light |
| 4 Built-in Microphone | 9 Micro USB Port: DC 5V/1A |
| 5 Volume Up/ Next Song | |


PARAMETER

- | | |
|---|-----------------------------------|
| • Working Time: 10-12h battery life at 60% volume | • Charging Lead Time: 2.5-3 hours |
| • Stand-by Time: ≥300 hours | • Work Voltage: 5V / 1A |
| • Bluetooth Range: ≤15M | • Wattage: 5W |
| • Frequency: 20HZ-20KHZ | • IP Rating: IPX7 |
| • Bluetooth Version: V5.0 | • Battery Capacity: 750 mAh |

OPERATION INSTRUCTION



Volume Down:
Long press "-" to reduce volume.



Previous Song:
Short press "←" to switch back to the previous song.

Turn On Speaker:
Long press "▶" for 1 second till hearing "Power ON".

Turn Off Speaker:
Long press "▶" for 1 second till hearing "Power OFF".

Bluetooth Pairing

Hold the power Button "▶" to enter Bluetooth Mode

Pause/Play:

Under the Bluetooth mode and TF card mode, short press to play or pause music.
Under AUX audio mode, short press 2 times to play music.

Answer the Call:


When the speaker is connected with phone, the speaker will beep if there is an incoming call. Press the "▶" to answer the call.

Hang Up the Phone:

Press the "▶" to hang up the phone when the speaker is connected with phone.

Reject the Phone Call:

Long Press the "▶" to reject the phone call when the speaker is connected with phone.




Volume UP:
Long press "+" to increase volume. When it reaches the Max. volume, you will hear beep sound.

Next Song:

Short press "→" to move to the next song.

MICRO USB CHARGING PORT

Please charge the speakers with the supplied micro USB charging cable and use the DC power adapter that is less than 5V.




Micro USB Port




USB Charging Cable

INDICATOR LIGHT




Indicator Light



Indicator Light

TF CARD MODE

You can play music in the TF Card. You can insert a TF or Micro SD card and the speakers will read it automatically. Enjoy your music anytime and anywhere.



TF card slot



TF card

Charging Instruction:


When the speaker's battery is low, you will see the red indicator light is flashing and the speaker will automatically shut down. Use the supplied USB cable to charge it. While the speaker is charging, you will see a red indicator light. Once the speaker is fully charged, the indicator light will turn blue.

Bluetooth Pairing:

Hold the power button to turn the speaker on. The speaker will automatically enter Bluetooth mode by default. You will hear a voice prompt "Bluetooth Mode" and the blue indicator light will flash quickly. After successfully pairing, the speaker will beep and the indicator light will turn blue.

AUX INPUT MODE

If your device is not bluetooth-enabled, easily connect with TV or other devices via this 3.5 mm audio cable.



AUX Input Port



MZ-501

3.5mm Audio Cable

Audio Devices

BLUETOOTH MODES


You can pair your device and the speakers as follows:

1. Hold the "▶" to turn the speaker on. The speaker will automatically enter Bluetooth mode by default. You will hear a voice prompt "Bluetooth Mode" and an blue indicator light will flash quickly.



2. The first time that you pair the speakers and your device, you should turn your device's Bluetooth function on and search for the speaker. The device will display the speaker's name "MZ-501". Tap the speaker's name and it will automatically pair with your device. After successfully pairing, the speaker will beep and the indicator light will turn blue.

3. When the speaker and your device has been successfully paired, you can play music through your device and control the music through the speaker. If you want to connect different device with this speaker, short press "▶" 2 times to cut the present bluetooth connection. And then follow the above 2 steps to enter bluetooth pairing mode.

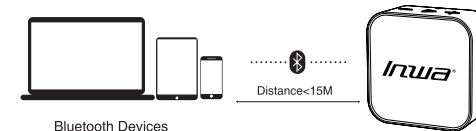

Bluetooth Devices

MZ-501

Note:

1. For bluetooth connection, please do not insert TF card or connect with audio cable.
2. When you turn on the speaker, it will automatically search for the device connected recently. If the bluetooth of the device is activated, the speaker will automatically connect and pair. After successfully pairing, you will hear a beep sound.
3. Bluetooth has an effective communication range of 15 meters. Make sure there are no large obstructions within this range. For the best results, it's best to use the speaker within 5 meters of your device.
4. The speaker will automatically turn off in 30 minutes if there is no bluetooth connection or no music played.

